
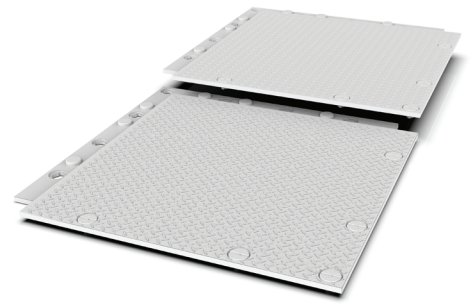
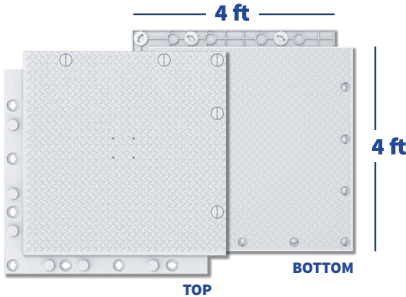


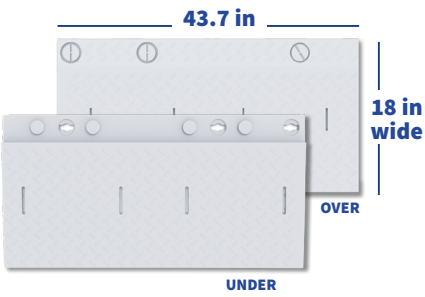

PRODUCT SPECIFICATIONS

RAMP SPECIFICATIONS

		
MODULE SIZE	ACTUAL PANEL DIMENSIONS 4 ft L x 4 ft W x 1½ in H (16 ft ²) 1.2 m x 1.2 m x 3.8 cm (1.49 m ²) USABLE PANEL DIMENSIONS 43.625 in X 43.625 in (13.216 ft ²) 1.108 m x 1.108 m (1.23 m ²)	43.75 in x 18 in x 1.5 in
WEIGHT	50 lbs (22.7 kg)	13.5 lbs
COMPRESSION STRENGTH	450 psi (3,100 kps)	
MAX WHEEL LOAD	300 psi (2,068 kps)	
MAX ALLOWABLE DEFLECTION	3 in (7.62 cm)	
COLOR	Translucent white or grey	
MATERIAL	Virgin HDPE Plastic	Virgin HDPE Plastic
TEMPERATURE RANGE	-4° F – 113° F (-20° C – 45° C)	
BURN RATING	UL 94-HB	
DESIGN FEATURES	Diamond surface texture, closed-back design, overlapping/underlapping flanges enhance load spread and create a smooth surface	Under and over configuration adjoin with appropriate edge of the panels. Pairs of panels are used to create build joints. Meets ADA compliance requirements (US).
CONNECTION SYSTEM	Preinstalled nylon cam locks; vertical locking system – no loose parts T-bar locking tool	
SHIPPING CAPACITY	US Standard 48 ft flatbed truck: 840 panels/11,340 ft ² (1053.52 m ²) 40 ft ISO HC shipping container: 840 20 ft ISO shipping container: 420	